

DS-03: Box Sluice (1V- 1.50m x 1.80m) at km 21.80 to be replaced by (2V- 1.50m x 1.80m)

DS-04: Box Sluice (1V- 1.50m x 1.80m) at 28.480 km to be replaced by (2V- 1.50m x 1.80m)

DS-05: Box Sluice (1V- 1.50m x 1.80m) at km 29.920 to be replaced by (3V- 1.50m x 1.80m)

DS-02: Box Sluice (1V- 1.50m x 1.80m) at Km 6.450 to be replaced by (2V- 1.50m x 1.80m)


DS-01: Box Sluice (1V- 1.50m x 1.80m) at Km 2.775 to be replaced by (1V- 1.50m x 1.80m) constructed by BWDB

Key Information: Polder-15

- (a) Embankment: 30.78 km
- (b) Re-sectioning of Embankment: 23.92 km
- (c) Construction of Retired Embankment : 6.86 km
- (d) Drainage Sluice (Replace) : 4 Nos.
- (e) Drainage Sluice (New by BWDB): 1 No.
- (f) Flushing Sluice(Replace) : 4 Nos.
- (g) Re-excavation of Drainage Channel: 14.24 Km
- (h) Slope Protection: 4.44 Km
- (i) Bank Protection: 0.10 Km
- (j) Project Area: 3441 ha.

Coastal Embankment Improvement Project Phase-1 (CEIP-1)

Polder 15: Map Showing Proposed Interventions

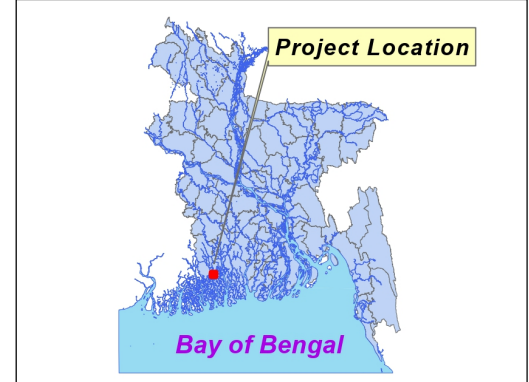

Legend

- Chainage
- Khal alignment
- Drainage Sluice
- Embankment
- River

Polder 15:
 Km 0.00 to 30.78
 CL: 5.00m PWD with side slope R/S 1:3 & C/S 1:2